



**PYRAMID SERIES
PROXIMITY**


P-700 Yukon Proximity Reader

Data Sheet

Read Range ^a: PSC-1 - Up to 14 inches (356 mm) PSI-4 - Up to 10 inches (254 mm)		PSM-2 - Up to 10 inches (254 mm) PSK-3 - Up to 6 inches (152 mm)	
Size: 8.5 x 6 x 1 inches (216 x 156 x 26 mm)		Weight: 19.8 oz. (562 g)	
Input Voltage ^b: +5 to 14 VDC		Current Draw: 285 mA typical	
LED Indicator: Oversized Four-State Standard (Red, Green, Amber, and Off)		Audio Tone: Standard	
Frequency: 125 KHz excitation		Operating Temperature: -40° C to +65° C	
Colors: Black		Metal Mounting: Must be stood-off for proper operation.	
Formats: Wiegand (26-bit Industry Standard and custom formats) and ABA Track II magnetic stripe (clock and data)			
Credential Compatibility: Standard - Pyramid Series Cards and Tags (PSC-1, PSI-4, PSM-2, and PSK-3) Optional ^c - HID (ProxCard II, ISOProx II, and ProxTag II) and Pyramid Series Cards and Tags			
Warranty: The P-700 carries a limited lifetime warranty against defects in materials and workmanship.			
Certifications: CSA, UL, FCC, CE, C-Tick.			

- Read range is stated in a clean RF and electrical environment using PSC-1 cards presented parallel to the reader surface with the reader operating at 12 VDC. Additionally, read range may be affected by local installation conditions.
- Use of a linear power supply is always recommended.
- To designate optional HID compatibility, add the "H" suffix to the model number (e.g. P-700-H). For further information, see the section regarding HID compatibility in the Pyramid Series Reader Product Manual.

Pyramid Series Proximity™

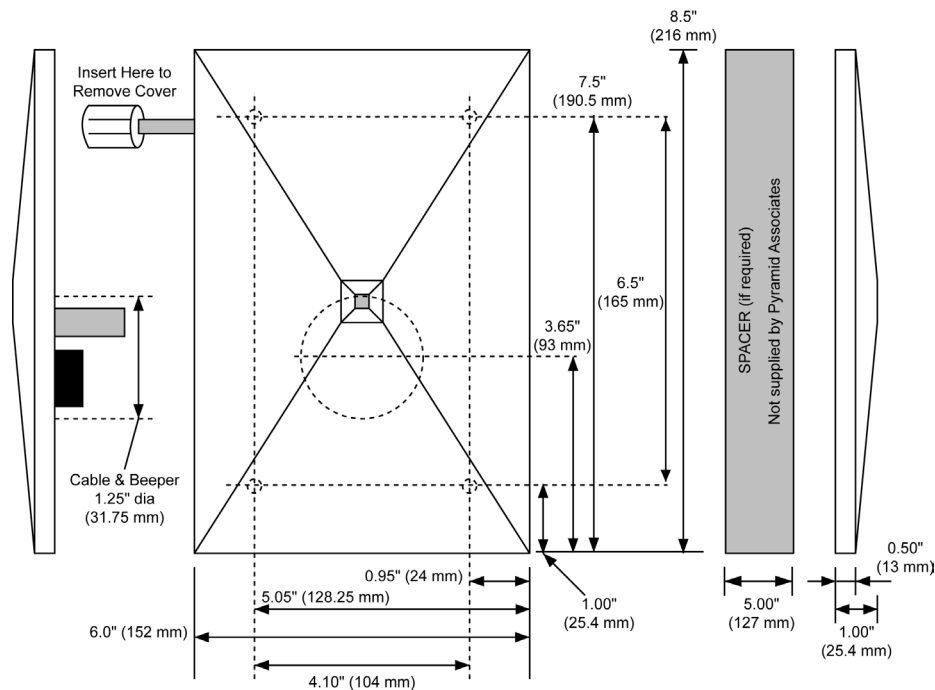

Farpointe Data reserves the right to change specifications without notice.

©2004 Farpointe Data, Inc. - All other trademarks are the property of their respective owners.

Protected by U.S. and Worldwide Patents



Farpointe Data, Inc.

e-mail: sales@pyramidseries.com

web: www.pyramidseries.com

Presented By